





TRIMMER BASE

Original Operating Instructions


IDU WR-B8

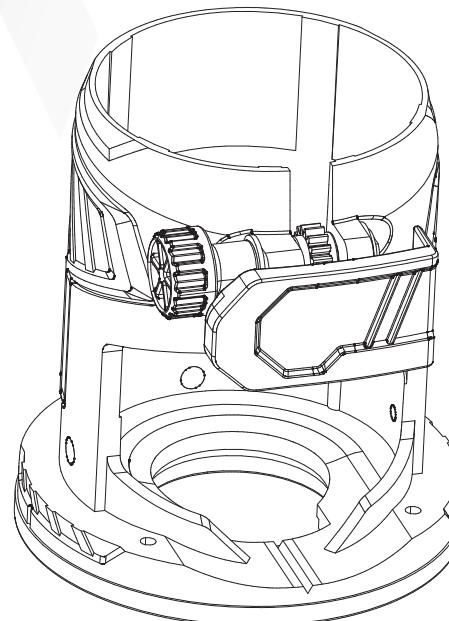

To reduce the risk of injury, the user must read and understand the Operator's Manual before using this product. Save these instructions for future reference.

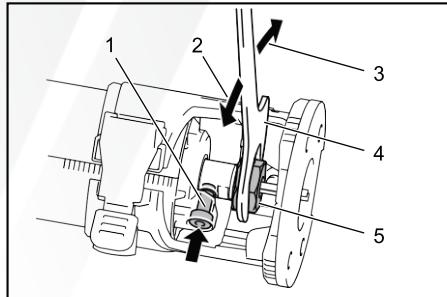


- 1. Shaft lock 2. Loosen 3. Tighten 4. Wrench 5. Collet nut

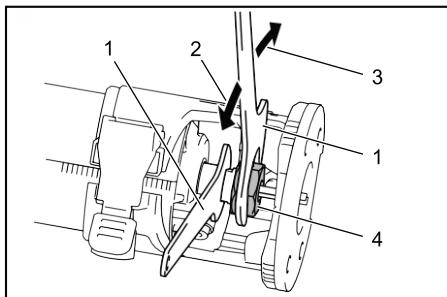

- 1. Wrench 2. Loosen 3. Tighten 4. Collet nut


NOTE: The shaft lock may not return to the original position when you tighten the collet nut at the installation of the trimmer bit. The shaft lock returns to the original position when you start the tool.

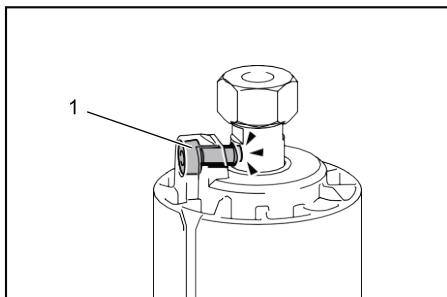


- 1. Shaft lock

Installing or removing the trimmer base


1. Open the lock lever of the trimmer base, then insert the tool into the trimmer base aligning the groove on the tool with the protrusion on the trimmerbase.

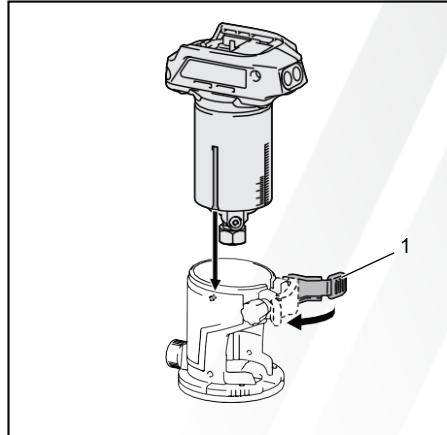

- 1. Lock lever
2. Close the lock lever.
3. Attach the dust nozzle to the trimmer base, and then tighten the thumb screw.

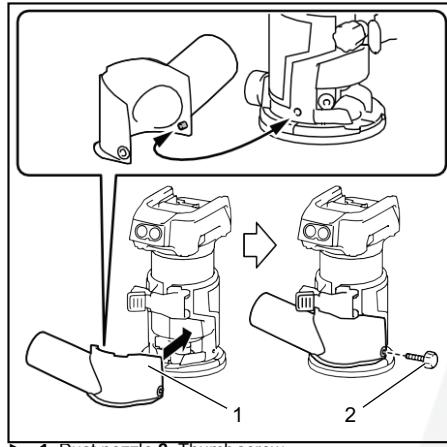


- 1. Dust nozzle 2. Thumb screw

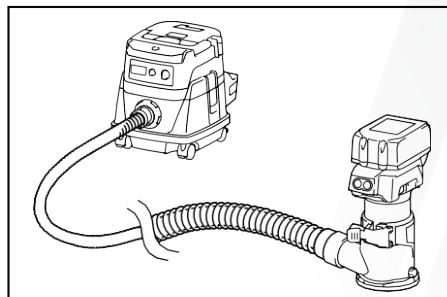

To remove the base, follow the installation procedure in reverse.


Adjusting cutting depth with trimmer base

To adjust the cutting depth, open the lock lever, then move the tool base up or down by turning the adjusting screw. After the adjustment, close the lock lever firmly.

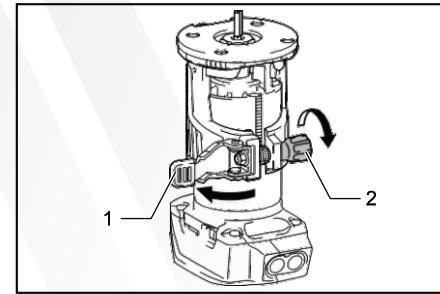

- 1. Lock lever 2. Adjusting screw
- Trimmer Base is Optional accessory

NOTICE: If the tool is not secured after closing the lock lever, tighten the hex nut, and then close the lock lever.

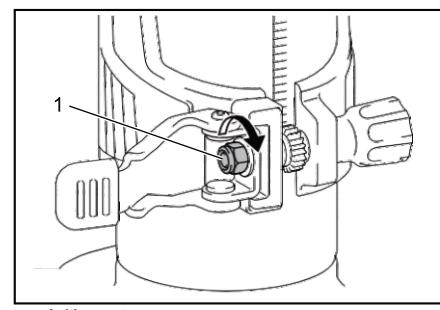


- 1. Hex nut

Adjusting cutting depth with the plunge router base


Plunge Router Base is standard Accessory for this model

1. Place the tool on the flatsurface.
2. Select the stopper screw by rotating the stopper base.

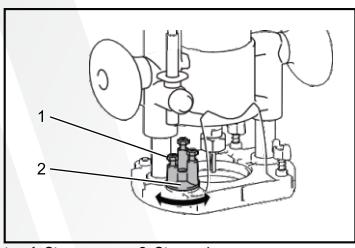


- 1. Stopper screw 2. Stopper base

3. Loosen the stopper pole fixing nut, then pull up the stopper pole while pressing the feed button.

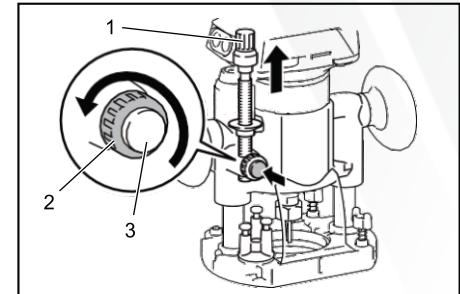


- 1. Stopper pole 2. Fixing nut 3. Feed button

4. Push down the tool until the tip of the trimmer bit touches the flat surface, and then turn the fixing lever to secure the tool.

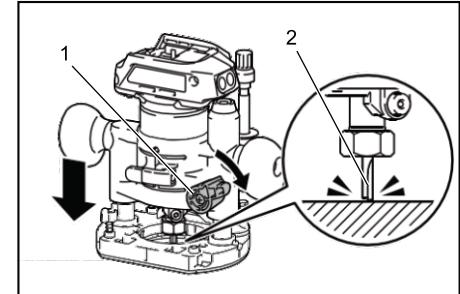


- 1. Fixing lever 2. Trimmer bit

5. Press down the stopper pole while pressing the feed button until it contacts the stopperscrew.

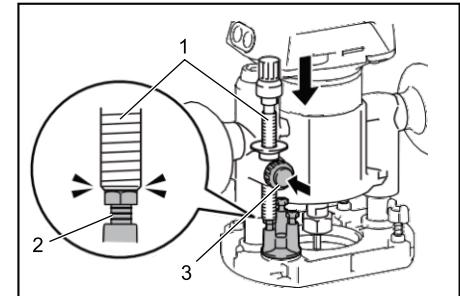

- 1. Stopper pole 2. Stopper screw 3. Feedbutton

6. Slide the depth pointer so that the pointer indicates "0" on the scale.




- 1. Depth pointer
- 7. Adjust the cutting depth by pulling up the stopper pole while pressing the feed button.



ULTRA
SERIES


قاعدة تريمير خدمستلا يلل د IDU WR-B8

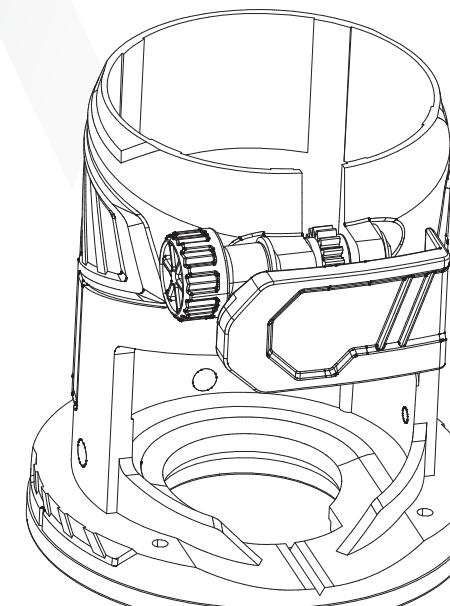

بنش المقدمة دعاع ع مقطع القم طبب


قطع القم طبب لفاف و اعلال دفال ادعاع كرح مث ،لفق العارذ حفت
طبب الديج طبب لفاف و اعلال دفال ادعاع كرح مث ،لفق العارذ حفت

طبب الديج طبب لفاف و اعلال دفال ادعاع كرح مث ،لفق العارذ حفت

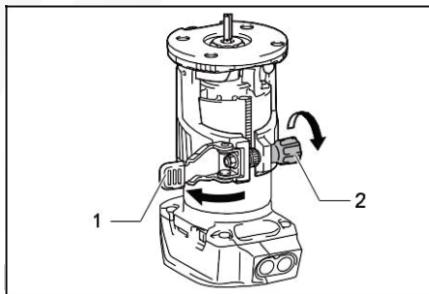

لفق العارذ 2 طبب الغورب ▶

ظفحطهور ماحكا بيقف لفق العارذ ففال إـ بعدفال انامي تميت م لذا
داسيسال دلامواصرلقي العارذ قفل أم ث

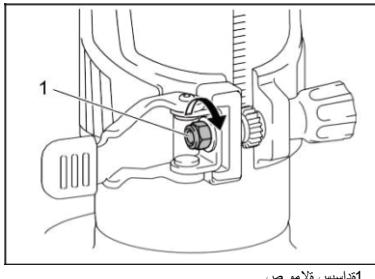


لتداسيس دلامو من ▶

سط العديخت الجاصلم دعاع ع مقطع القم طبب

1. ومست حطس يعل دفال اضع.


2. ريدو تغورط نع ددامس الغور بدقعنان الدعاع.

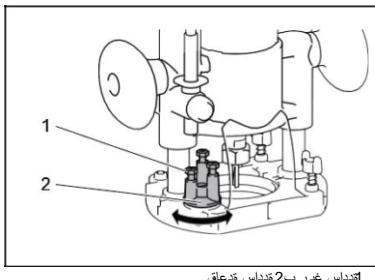


لددامس غور ب2 لددامس دعاع ▶

3. علال ددامس الدعم بحس امث ،ددامس الدعم تبيث دلامو صينفك مق

ذني التغز على طغضن اللخ

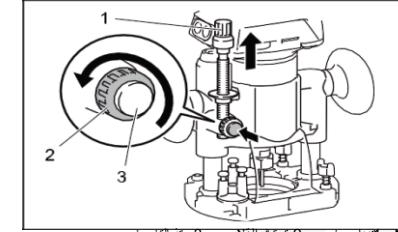


لددامس غور ب2 بديث الماء موص 3 ديلانع رز
4. بديشت القم لفوط سالمي تتح لفسال دفال افعدلسا حلطلا ويحيث
فال اشيبيت لتيث لتيث اتعار رذدا

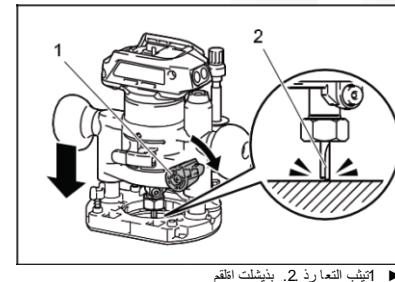


لتيث العارذ 2 بديشت اقام ▶

5. ذني التغز على طغضن اللخ ددامس الدعم على لفسال طاضع
ددامس الغور بسالم يفتح

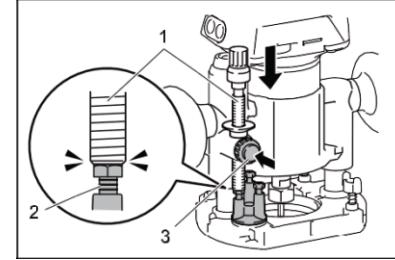

لددامس غور ب2 لددامس غور ب3 ديلانع ارز ▶


6. ث بحيم الرش موكرج إرش المؤربشي "0" ساقى المعلي ."

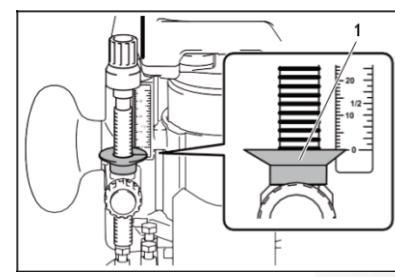


1. قم الرش مؤ

لخل دفال ددامس الدعم بحس قيرط نع مقطع القم طببا


ذني التغز على طغضن

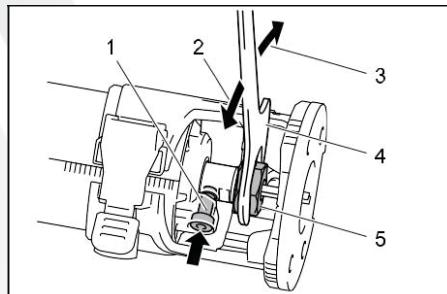

► 1. لف دعوال 2. كفال 3. طير لل 4. غبار حاتم
5. ة القمة تصمو

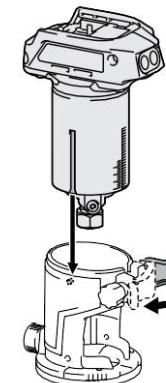


► 1. لف العارز

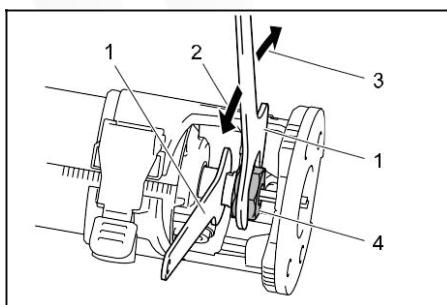

► 1. غبار يحافت مكفل لل 3. طير لل 4. فم اللاصمو .


ظفحول: لا موص طير دعن بالصالا عضالمو الى دعوال لف دعى ال دع
وطلاق لا مقل بيكوت دنعي دوعي بيزنثت بالصالا عضوملا بلا دوعلان لف
هال الشغى تده بدعون.

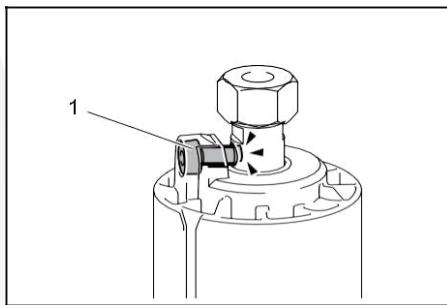

► 1 دعمو لف.


بذيشت المآل ددعاق هالاز او ابكيورت

1. بذيشت المآل ددعاق لف عارز حقنالخد ام ثقال ددعاق في هالا
هال ددعاق على دجو مو اله تو الن معه دهال اعلى دجو المودودخال اهذاح لمذيشتال
بذيشت.

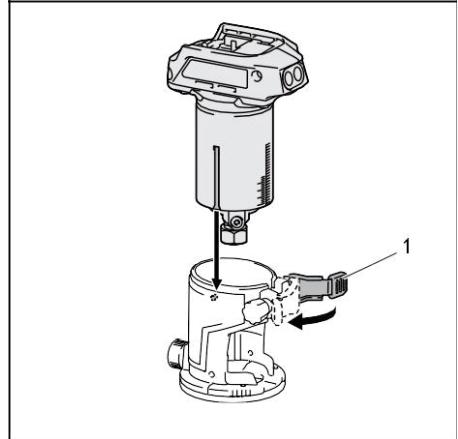


► 2. بذيش التندا ادعا ع براب الغاهفو لصيتو بمقطير ماحكا بمع م ث

مالبه اغي رب

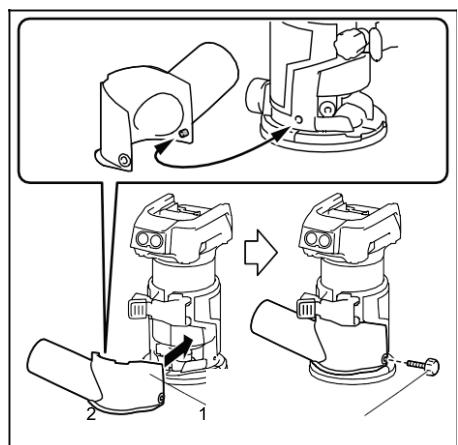

► 1 امي ابيغور براغب التيار

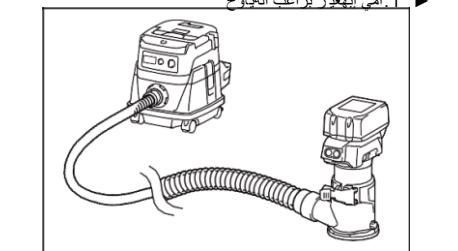

هدعاق الهال زالعكل بيكرر التاء رج ابعت ا